

# TERAND

The Maintenance Professional's Choice


## SAFETY SOLVENT CHLORINATED 521

A residue-free, super fast-drying, high-powered spray that dissolves grease and rinses away dirt and grime without injury to working parts. Contains an acceptable replacement for 1,1,1-trichloroethane under the EPA SNAP program. Contains no petroleum distillates. Features a 30,000 volt dielectric strength, making this the only degreaser safe for use on electric motors, generators, relays and control panels while equipment is in operation. Energized equipment use only. Not to be used for motorized vehicle maintenance, or their parts. Do not use on plastics.



### FEATURES

- Powerful Flushing Action
- Safe for Cleaning Energized Electrical Equipment
- 30.0 kV Dielectric Strength (ASTM D-877)
- Level-1 Storage Rating
- No Petroleum Distillates

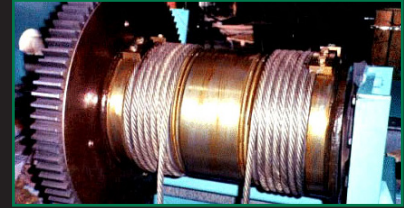

### FOR USE ON

Energized Industrial Equipment, Heating and Air Conditioning Equipment, Refrigeration Equipment, Generators, Electric Motors, Windings and Power Tools.

<b>Packaging:</b>	<b>UOM</b>	12/CS
	<b>Container Size</b>	20 OZ. AEROSOL
	<b>Net Fill Weight</b>	NET WT. 18 OZ. (1 LB. 2 OZ.) (510 Grams)
	<b>Shipping Weight</b>	15 lbs.
<b>Physical Properties:</b>	<b>Appearance</b>	Clear, Colorless Liquid
	<b>Odor</b>	Ether-like Odor
	<b>pH</b>	N/A
	<b>Spray Pattern</b>	Circular
	<b>Flash Point (Concentrate)</b>	None to Boiling
	<b>Specific Gravity</b>	1.454
	<b>Flammability</b>	Non-Flammable Spray
	<b>Dielectric Strength</b>	30,000 Volts
	<b>Propellant</b>	Carbon Dioxide
<b>Regulatory:</b>	<b>Coverage</b>	N/A
	<b>Solvent System</b>	Chlorinated
	<b>VOC%</b>	96.45%
	<b>VOC Restricted Area(s)</b>	50 State Compliant
	<b>NFPA Code 30B Storage Rating</b>	Level 1 Aerosol
	<b>EPA Number</b>	N/A
	<b>NSF Certified</b>	N/A

[www.cpcsaeroscience.com](http://www.cpcsaeroscience.com)  
(800) 327-1835

