


TERAND

The Maintenance Professional's Choice

EXPANDABLE INSULATING FOAM SEALANT 779

A unique one part urethane foam which expands as it dries and solidifies. Fills cracks and holes that caulk can't! Sprays as a liquid then expands and cures to a durable semi-rigid closed cell foam insulation. Each can dispenses over 800 linear feet of product when sprayed in a 3/8 inch cured bead (based on theoretical yield). Forms a water resistant, weather resistant and airtight bond on masonry, wood, metal, glass, tile and most plastics. Dries tack free in 10 minutes. Cures completely in 8 to 24 hours, depending on humidity. Fills cracks and plugs holes eliminating energy escape or the entrance of insects or rodents. Seals out Radon Gas. Deadens Sound when applied to sheet metal. Easy to use. Conforms to any shape as it expands.

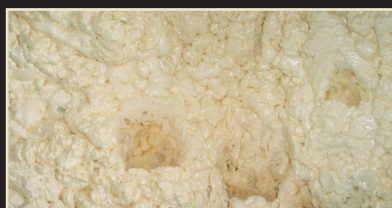

FEATURES

- Cuts Energy Costs
- Contains Flame Retardant
- Fills Holes, Seals Out Pests, Stops Dirt and Drafts, and Dampens Sound
- 1" Thickness Yields R-5 Insulating Factor

FOR USE ON

An insulating sealant on and around Air Conditioning, Ventilation and Heating Ducts, Plumbing, Window A/C Units, Spas, Hot Tubs, Boats, RV's, Electrical Equipment, Appliances, Refrigeration Units, Carpentry, Masonry, Conversion Vans and Buses, Auto and Truck Doors.



Specs:

Can Size	16 oz.
Net Weight	12 oz (340 Grams)
Shipping Weight	xxx
Packaged	12 cans per case
Extender Tube	xxx
Regulatory:	
Ozone Depleting Compounds	None
Recyclable Package	xxx
Flammable	xxx
Physical Characteristics:	
Color	xxx
Fragrance	xxx
Shelf Life	1 year +

www.cpcsaeroscience.com
(800) 327-1835

