

TERAND

The Maintenance Professional's Choice

DRY MOLY FILM LUBRICANT and COATING 954

Dry Moly Film Lubricant and Coating is a superior, long-lasting dry lubricant that withstands high temperatures and pressures. Repels dust and dirt and is resistant to water, alkalies and most acids. Prevents corrosion, seizing, wear, binding, squeaking and scraping.

Withstands temperature ranges from -78°C to +565°C (-110°F to +1050°F). Resists pressures up to 100,000 psi. Contains pure Molybdenum Disulfide micro-particles which burnish themselves into metal surfaces and provide a bonded dry lubricating film.




FEATURES

- Non-Chlorinated
- Anti-Friction
- Anti-Seize
- Non-Corrosive
- Waterproof

FOR USE ON

- Oil Drilling Equipment • Foundries • Automotive Plants
- Vehicle Maintenance • Sewing Trades • Paper and Corrugated Converting • Chemical Plants • Woodworking
- Marine • Agricultural & Military Equipment
- Road Equipment • Aircraft Maintenance
- Steel Mills and Mining Operations

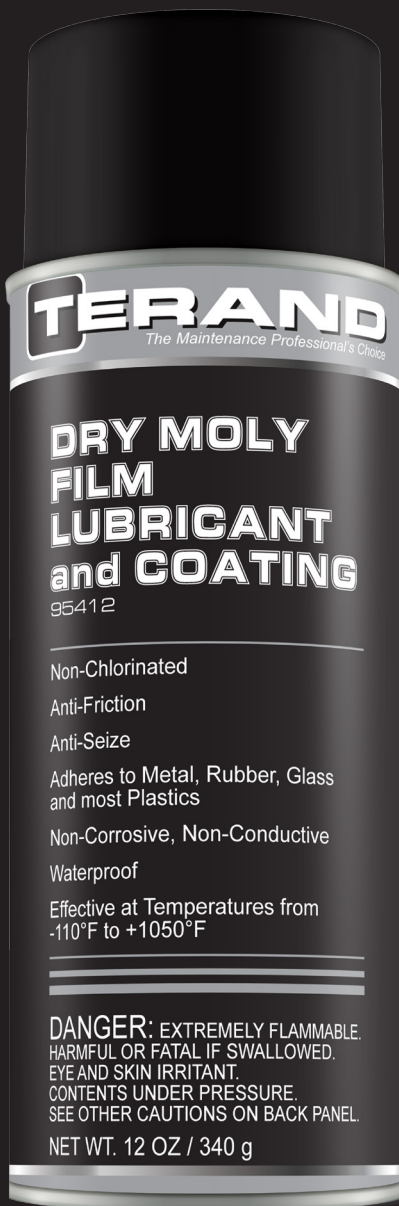

Specs:

Can Size	16 oz.
Net Weight	12 oz. (340 g)
Shipping Weight	16.5 oz per can
Packaged	12 cans per case
Extender Tube	No

Regulatory:

Ozone Depleting Compounds	None
Recyclable Package	Yes
Flammable	Yes

Physical Characteristics:

Color	Black
Fragrance	Solvent
Shelf Life	1 year +

www.cpaeroscience.com
(800) 327-1835

